



## ARCOY INDUSTRIES (INDIA) PVT. LTD.

Your partners in corrosion prevention

### ARMARINE 35A

CHLORINATED RUBBER BASED COATING FOR MARINE AND INDUSTRIAL ENVIRONMENTS



#### INTRODUCTION

**ARMARINE 35A** is a single pack, chlorinated rubber based coating having excellent resistance to industrial and marine atmosphere.

**TYPICAL USE :** As an intermediate or finishing coat on steel structures in marine and industrial environment.


#### TECHNICAL DATA

- Application : **Air Spray or brush**
- Volume Solids : **40 - 45%**
- Consistency : **Smooth, Uniform**
- Specific Gravity at 25<sup>0</sup>C : **1.0 - 1.15 gm / cc**
- Viscosity at 25<sup>0</sup>C : **40 - 160 sec.**
- Dry Film Thickness (DFT) : **40 - 50 microns / coat**
- Covering capacity : **8 - 10 sq. mtr. / ltr. / coat**
- Drying at 25<sup>0</sup>C : **3 - 4 hrs. ( Touch Dry )**
- Hard Dry : **24 hrs.**
- Further Workability : **After tack free**

**CORROSION  
NO ENTRY**

INDUSTRIAL & MARINE COATINGS

A name in the making of Colours & Coatings

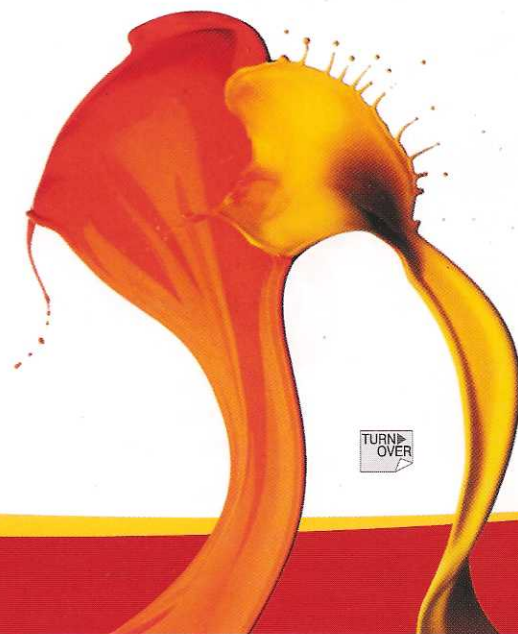

TURN  
OVER



## ARMARINE 35A

CHLORINATED RUBBER BASED COATING FOR MARINE AND INDUSTRIAL ENVIRONMENTS

**CORROSION  
NO ENTRY**

### CHARACTERISTICS

- Flexibility & Adhesion : **Excellent to steel & concrete**
- Resistance to corrosion : **Excellent**
- Resistance to water : **Excellent**
- Resistance to mineral acid : **Excellent**
- Resistance to brine solution : **Excellent**
- Resistance to chemical fumes : **Excellent**
- Resistance to solvents : **Poor**

### APPLICATION DETAILS

#### Surface Preparation :

**CONCRETE** : The concrete surfaces must be thoroughly cleaned by means of wire / soft brushes to remove all loose particles, dust, dirt etc.

**METAL** : Abrasion blasting like sand / shot / grit blasting is recommended to achieve a surface up to Sa 2½ specifications of SSPC-SP-10 i.e. to near white metal.

Degreasing is done to remove oil and grease. Organic solvents, alkaline solutions, steam, hot water, detergents will completely remove greasy substances.

**The surface must be absolutely dry.**

**Application** : It can be applied by brush or by conventional spraying equipment.

**Packaging** : It can be made available in various sizes.

**P.S.** : The above information is given in goodwill without any warranty.



### ARCOY INDUSTRIES (INDIA) PVT. LTD.

Your partners in corrosion prevention

For any further information, please contact our technical cell at the below mentioned address:

**Head Office Address:** 606, Abhijeet-I, Nr. Mithakhali Six Roads, Ellisbridge, Ahmedabad - 380006. Gujarat. India.

**Ph:** +91-79-2642 7762, 2640 1228, **Fax:** +91-79-2656 1331

**Customer Care No.:** +91-79-26425300. **E-mail:** [arcoy@arcoy.com](mailto:arcoy@arcoy.com) **Website:** [www.arcoy.com](http://www.arcoy.com)

**Regional Office Address:** Flat No.: 183/4, Indian Flats, First Floor, Industrial Estate Road, Anna Nagar, West Extension, Chennai- 600001. India. **Telefax:** +91-44-2656 7638. **E-mail:** [chennai@arcoy.com](mailto:chennai@arcoy.com)